

BenQ


MW811ST

Digital Projector



HIGHLIGHTS

- 2500 ANSI Lumens
- WXGA Native Resolution
- Low Total Cost of Ownership
- Microphone Mini Jack
- Built-in 10W Speaker x 2
- USB Reader
- USB Display (Plug-n-Play)
- LAN Display
- 4-1 Display
- Remote Desktop
- Wireless Display (Optional)
- Crestron RoomView Compatible
- PJ-Link Compatible
- BrilliantColor™
- 3D Color Management
- VIDI™
- Auto Keystone (Vertical)
- Keystone ± 30 Degree
- 6 Segment Color Wheel
- Variable Audio Out
- Closed Captioning

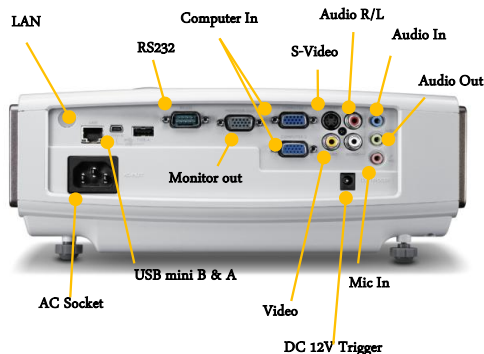

Projection System	DLP® technology by Texas Instruments®	
Native Resolution	WXGA (1280 x 800)	
Brightness	2500 ANSI lumens	
Contrast Ratio	4600:1 (Full on/Full off)	
Keystone	Auto Keystone / Manual Vertical ±30°	
Aspect Ratio	16:10 Native (5 aspect ratio Selectable)	
Color	Full 1.07 billion color palette	
Lens	F=2.6	
Zoom Ratio	Fixed	
Image Size (Diagonal)	48" to 300"	
Throw Ratio	0.5 (95" @ 1M)	
Lamp	210W, 4000/5000 hours (Normal/Economic mode)	
Computer Compatibility	VGA(640 x 480) to UXGA(1600 x 1200)	
HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p	
Video Compatibility	NTSC, PAL, SECAM	
Horizontal Frequency	31-99 kHz	
Vertical Scan Rate	48-120 Hz	
Input Terminals	PC	Analog RGB: D-sub 15 pin x 2(Shared with Component)
		LAN Networking: RJ-45 x1 (LAN Display)
		USB Type A x1 (USB Reader), Type Mini-B x1 (USB Display)
	A/V	S-Video: Mini Din 4 pin x 1
Composite Video: RCA x 1		
Microphone: Stereo Mini Jack x1		
Audio L/R : RCA x 2 Stereo Mini Jack x 1		
Output Terminals	PC	Monitor out: D-sub 15 pin x 1
	Audio	Variable Audio Out : Stereo Mini Jack x 1
		Speaker: 10W x 2
	DC 12V Trigger	
Control Terminal	Serial Connector : RS232 9 pin x 1	
	RJ45 x 1 (LAN Control)	
	USB Type Mini-B x1 (Page up/down)	
Dimensions(W x H x D)	11.4 x 5.03 x 9.9 inch (290 x 128 x 252 mm) with Lens	
Weight	7.5 lbs (3.4kg)	
Power Supply	AC 100 to 240 V, 50/60 Hz	
Power Consumption	Typical 290W, Standby < 1W	
Audible Noise	35/30 dB (Normal/Economic mode)	
On-Screen Display Languages	Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (26 Languages)	
Picture Modes	Dynamic Mode	Presentation Mode
	sRGB Mode	Cinema Mode
Functions	User 1 Mode	User 2 Mode
	BrilliantColor™	Blank
	VIDI™	Panel Key Lock
	3D Color Management	Auto Off
	Crestron LAN Control	Security Password
	Closed Captioning	HDTV compatible
	Digital Zoom (x2)	High Altitude Mode
	Variable Audio Out	"Q?" Hot Key for FAQ
	Quick Cooling	3D Ready
	Quick Auto Search	Freeze
Accessories (Standard)	PJLink Compatible	Teaching Template
	Quick Start Guide	VGA Cable
Accessories (Optional)	Manual CD	Power Cord
	Remote Control w/battery	
	Wall Mount (P/N: 5J.J0T10.001)	Wireless Dongle (P/N:5J.J0614.021)
	Spare Lamp Kit (P/N: 5J.J3L05.001)	Carry Case

Available at: NETWORK Spectrum®

Call: 301-733-0657

Email: sales@networkspectrum.com

Other products available at:

www.networkspectrum.com/gschedule/