


8957HW-RJ

ImagePro 8957HW-RJ Advanced, Versatile LCD Projector

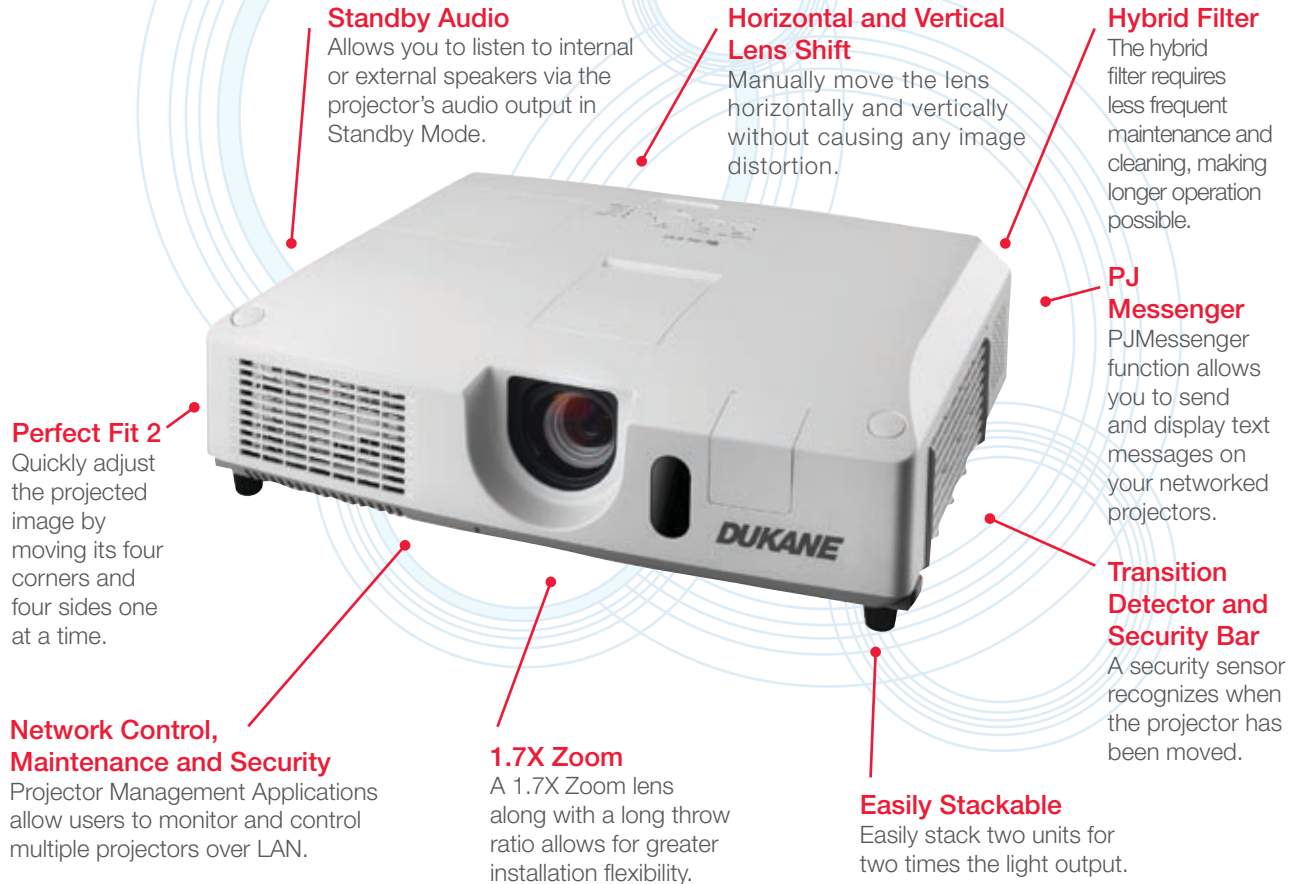

Features – Special University Feature Group

- 4000 Lumens Brightness
- WXGA (1280 x 800) Resolution
- Lamp access on top
- High performance (5000 HR) hybrid filter with easy access
- Special 16 Watt audio output
- New Microphone Input
- New 3000/5000 hour lamp
- Built-in Anti-theft security
- Audio "passthrough" permits use of the sound system even when projector is off
- Network (LAN) Control, Maintenance and security
- 0.5 Watt Power Saving Standby Mode
- PC less presentations from a memory card or the network
- HDMI Input
- Zoom range lens of 1.7x

THE ALL NEW
DUKANE
Education. Presentation. Inspiration.

Available at: **NETWORK Spectrum®**

Call: 301-733-0657

Email: sales@networkspectrum.com

Other products available at:


www.networkspectrum.com/gsaschedule/

Toll-free: 888-245-1966 • Web: www.dukane.com/av
Fax: 630-584-5156 • E-mail: avsales@dukane.com

ImagePro 8957HW-RJ Portable LCD projector

Back Panel

Connections

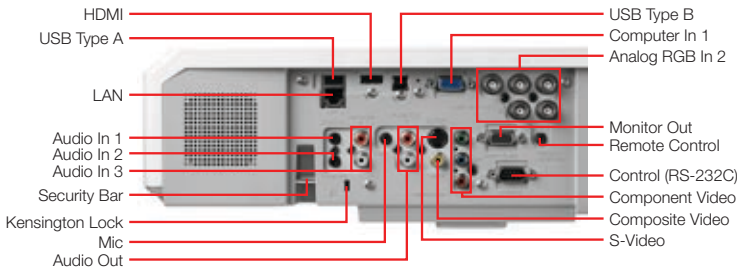

Key features:

- WXGA (1280 x 800) native resolution (16:10 aspect ratio)
- 4000 ANSI lumens of brightness
- Stackable for two times the light output
- HDMI input
- Easy maintenance in ceiling mount with lamp access on top & 5000 hour filter with front access
- Horizontal and Vertical lens shift
- Monitor loophrough & remote mouse control
- Microphone Input with amplifier
- PC less operation vis USB memory device
- 2000:1 Contrast
- Audio passthrough for sound when projector is off
- 16 Watt audio output
- 3000/5000 hour lamp life
- Lock slot, security bar and transition detector
- Five Year Warranty and One Year Peace of Mind Service

8957HW-RJ Projection Table

| Image Size 16:10 | | Throw Distance | |
|------------------|--------|----------------|------|
| Diagonal | Width | Min. | Max. |
| Inches | Inches | Feet | Feet |
| 30 | 25 | 3.1 | 5.2 |
| 60 | 51 | 6.2 | 10.5 |
| 80 | 67 | 8.4 | 14.0 |
| 100 | 85 | 10.6 | 17.5 |
| 120 | 102 | 12.7 | 21.1 |
| 150 | 126 | 15.9 | 26.3 |
| 200 | 169 | 21.2 | 35.2 |
| 300 | 256 | 31.9 | 52.8 |

Throw Ratio (distance to width) 1.5 to 2.5



Audio Visual Products
2900 Dukane Drive
St. Charles, Illinois 60174
Toll-free: 888-245-1966
Fax: 630-584-5156
E-mail: avsales@dukane.com
Web: www.dukane.com/av



ImagePro is a registered trademark of Dukane Corporation

#10-00036-00

Specifications

| | |
|-----------------------|---|
| Image Element | 0.63" polysilicon active-matrix TFT x3 |
| Brightness | 4000 ANSI lumens (3400 lumens in Eco Mode) |
| Resolution | 1280 x 800 pixels (H X V), WXGA |
| Contrast | 2,000 : 1 Active iris |
| Scanning Frequency | fh 15 -106 kHz, fv 50-120 Hz |
| Lens | Manual zoom (F1.6 - 2.1), 1.7X |
| Lens Throw Ratio | 1.5 - 2.5:1 throw distance to image width |
| Keystone Correction | Digital, vertical and horizontal +/- 40 deg. |
| Aspect Ratio | 16:10, 4:3, 16:9 selectable |
| Computer | SVGA, VGA, XGA, WXGA, SXGA, UXGA |
| Compatibility | MAC13" and MAC16" |
| Video Compatibility | NTSC, NTSC4.43, PAL, SECAM, PAL-M, PAL-N, Component Video, HDTV (1080i/p, 720p, 576i, 480i/p) |
| Image Control | Freeze function, electronic magnification and pan |
| Mouse Control | Using USB |
| Projection Modes | Front/rear/ceiling |
| Color Reproduction | 24 bit (16.7 million) |
| PC less presentations | USB-A storage device slot |
| Lamp | 245W UHP |
| Lamp Life | 3000 hours (typical) 5000 hours (Eco mode) |
| Audio Output | 2 speakers 16 watt combined |
| Throw Distance | 37" to 634" |
| Screen Size, diagonal | 30" to 300" |
| Inputs, Video | (1) Component, RCA x 3 (share w RGB) (1) S-video, Mini DIN 4-pin (1) Composite video, RCA x 1 |
| Inputs, Computer | (1) RGB, 15 pin D-sub (1) RGB, BNCx5 |
| Input Digital | (1) HDMI |
| Inputs, Audio | (2) Stereo mini jack: for PC 1&2 (1) RCA x 2 (for video) |
| Input from Mic | 3.5mm Mini Audio |
| Outputs, Audio | (1) RCA x 2, adjustable |
| Outputs, Monitor | RGB, 15 pin D-sub |
| Outputs, Control | RS-232, 9 pin D-sub USB Type B (Mouse control) |
| Remote Control | 3.5mm Mini Stereo |
| LAN Network Operation | RJ-45 |
| Security | Kensington lock slot & Security Bar |
| Fan Level | 35dB, ultra quiet; 29dB Eco Mode |
| Closed Caption | CCI, CC2, CC3, CC4, T1,T2,T3,T4 |
| Operating Temperature | 41-95 deg F |
| Power | AC 100-120V, AC 220-240V 50/60 Hz, 380 watt, >1W standby |
| Size (WxHxD) | 15.7" x 4.1" x 12.5" |
| Weight | 10.1 lbs. |
| Shipping Weight | 16 lbs. |
| Carton Size | 19" x 8" x 15" |
| Accessories Included | Remote control, batteries, power cord, RGB cable, operators manual, CD |
| Safety | UL/C-UL, FCC Class B |
| Optional Accessories | Lamp 456-8958H Ceiling Mount, Universal; RPM-U Filter; MU06641 |

Five (5) year limited warranty on parts and labor in North America, lamp is 90 day warranty (for other locations, local warranties apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.

Specifications subject to change without notice.

