

# 9137WU-RJ

## ImagePro 9137WU-RJ Portable LCD Projector



*The ImagePro 9137WU-RJ is a bright (4200 lumens), ultra high resolution WUXGA, HDTV, (1920 x 1200, 1080p) and versatile LCD projector with network control.*

### 9137WU-RJ FEATURES

- 4200 lumen brightness
- WUXGA resolution (1920 X 1200) 16:10
- Network capability RJ-45 for control, maintenance and security
- Easy Lamp access on top and hybrid filter on side
- Horizontal & vertical lens shift
- Zoom lens with large 2X range
- HDTV resolution and operation, HDMI input
- Audio pass-through for sound system operation when project is "off"



### Manual Horizontal and Vertical Lens Shift for Perfect Image Alignment

THE ALL NEW

# DUKANE

**Education. Presentation. Inspiration.**

[www.dukane.com/av](http://www.dukane.com/av)

Available at:  NETWORK Spectrum®

Call: 301-733-0657


Email: [sales@networkspectrum.com](mailto:sales@networkspectrum.com)

Other products available at:

[www.networkspectrum.com/gsaschedule/](http://www.networkspectrum.com/gsaschedule/)

# ImagePro 9137WU-RJ Portable LCD projector

## Back Panel Connections

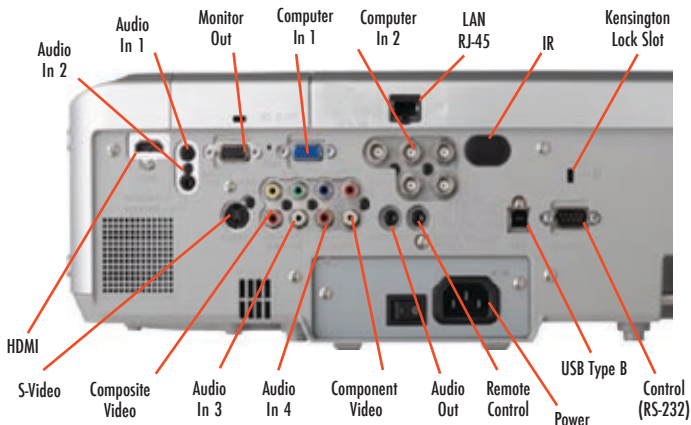

## FEATURES

- WUXGA (1920 x 1200) resolution
- 4200 ANSI lumens of brightness
- Full 1080p HDTV display and HDMI port.
- Network Capability, RJ-45, connection
- Perfect Fit using simple corner adjustments
- Easy lamp access on top & filter access on side
- Monitor loophthrough & remote mouse control
- Versatile mounting distance with 2X zoom
- Audio pass-through when projector is off
- Horizontal & vertical lens shift
- Kensington lock slot & security bar
- Five Year Warranty and One Year Peace of Mind Service

## 9137WU-RJ Projection Table

Image Size 16:10		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
30	25	3.2	6.4
60	51	6.4	12.8
80	68	8.5	17.0
100	85	10.6	21.1
120	102	12.7	25.4
150	127	15.8	31.6
200	170	21.2	42.5
300	255	31.8	63.7

Throw Ratio (distance to width) is 1.5 to 3.0

Image offset: None, the bottom of image can be on lens center line. Lens shift is available correction.

THE ALL NEW  
**DUKANE**  
Education. Presentation. Inspiration.

Audio Visual Products  
2900 Dukane Drive  
St. Charles, Illinois 60174  
Toll-free: 866.280.4298  
Fax: 630-584-5156  
E-mail: avsales@dukane.com  
Web: www.dukane.com/av



## Specifications

Image Element	0.76" polysilicon TFT x3
Brightness	4200 ANSI lumens, 3400 (whisper mode)
Resolution	1920x 1200 pixels (H X V), WUXGA
Contrast	1000:1 (using active iris)
Scanning Frequency	fh 31.5-106 kHz, fv 56-120 Hz
Lens	Manual zoom range 2X
Lens Throw Ratio	1.5 - 3.0 :1 throw distance to image width
Keystone Correction	Digital vertical +/- 30 degrees and lens shift
Aspect Ratio	16:10 native, 4:3 selectable
Computer	VGA, SVGA, XGA, SXGA, WXGA, Mac 16"
Compatibility	UXGA, WSXGA, WUXGA,
Video Compatibility	NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, SE-CAM, HDTV 1080i/p, 720p, 576i, 480i/p
Image Control	Freeze function, electronic magnification and pan
Mouse Control	Using USB
Projection Modes	Front/rear/ceiling
Picture Adjustment	Perfect Fit by easily adjusting the 4 corners
Color Reproduction	24 bit (16.7 million)
Lamp	275W UHB
Lamp Life	2000 hours (3000 hours Whisper Mode)
Audio Sound	8W, 2 x 4W speakers
Throw Distance	35" to 350"
Screen Size, diagonal	30" to 300"
Inputs, Video	(2) Component, RCA x 3, (BNC Shared) (1) S-video, Min DIN 4-pin, (1) Composite video, RCA x 1 (2) Audio, Stereo, RCA x 2, (L/R)
Inputs, Computer	(1) RGB Signal: D-sub, 15 pin, (1) RGB, BNC x 5 (shared component) (1) HDMI (2) Audio, Stereo mini jack, (1) Stereo mini jack, Wired remote
Outputs Monitor	15 pin, D-sub
Outputs Audio	Audio, Stereo mini jack x 1
Outputs, Control	9 pin D-sub Connector, RS232 USB type B (remote mouse only)
Network, Ethernet	RJ-45 port / 100Base-T
Security	Kensington slot, and Security bar
Fan Level	35dB, (28dB in whisper mode)
Operating Temperature	41 to 95 deg. F (5-35 deg C)
Power	AC 100-120V, AC220-240V 50/60 Hz, 460 watt
Size (WxHxD)	16.5" x 5.5" x 14"
Weight	15.8 lbs.
Carton Size	21" x 14" x 19"
Shipping Weight	25 lbs.
Accessories Included	Remote control, batteries (AA), power cord, RGB cable, operator/safety manual.
Safety, Stds.	UL60950, C-UL, FCC Part15, Class A, CE, RoHS, WEEE, C-TICK, GOST-R
Optional Accessories	Lamp 456-8949H, Ceiling mount, universal; RPA-U, Filter; MUO5661

Five (5) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.

**5YR**