

400UX-3 • 400UXn-3 • 460UX-3 • 460UXn-3

40" and 46" Commercial LCD Displays

If it's worth displaying,
it's worth displaying well.



Reliable 24/7 Continuous Operation

Innovative Samsung cooling technologies allow your message to be displayed with highly reliable 24/7 continuous operation.



Impactful Video Walls

The UX-3/UXn-3 displays can be configured in video walls up to 10 x 10, for maximum impact.



Crisp HD Graphics and Natural Color

The UX-3/UXn-3 displays feature 1920 x 1080 high-resolution LCD panels, up to 700 nits brightness, 8ms response time and 10,000:1 dynamic contrast ratio, for impactful motion graphics full of sharp detail.



Versatile Connectivity

Broad connectivity enables flexible content options, including high bandwidth signals through the DisplayPort connection, and an RJ45 LAN port to simplify monitor control over your network.



Integrated PC, MagicInfo™ Software

The 400UXn-3 and 460UXn-3 deliver easy content control of multiple monitors via network.



Integrated Speakers

Built-in 10W stereo speakers complete the multimedia experience without having to purchase or wire external speakers.



Energy-Efficient

Samsung is committed to creating more efficient, more environmentally conscious technologies. From manufacturing to shipping to the way your product operates, we're always looking for a better way of doing things.

If you have a message worth delivering, we'll make sure it arrives with impact. The Samsung UX-3 and UXn-3 LCD displays offer clear, bright pictures with natural color, smooth motion graphics and crisp, clear text. Whether you're promoting a restaurant in a hotel lobby or advertising a retail clothing sale or publicizing arrival and departure schedules, your message will be noticed. The Samsung UX-3 and UXn-3 LCD displays. **Business. Innovated.**

SAMSUNG

For complete product information, visit samsung.com/prodisplay

400UX-3/400UXn-3 460UX-3/460UXn-3 Commercial LCD Displays



KEY SPECIFICATIONS

For complete product specifications, visit samsung.com/prodisplay

Product	Model Number	400UX-3/400UXn-3	460UX-3/460UXn-3	
Panel	Diagonal Size	40"	46"	
	Type	S-PVA 60HZ	S-PVA 60HZ	
	Resolution	1920 x 1080 (16:9)	1920 x 1080 (16:9)	
	Brightness (Typical/Max)	500 cd/m ² /700 cd/m ²	500 cd/m ² /700 cd/m ²	
	Contrast Ratio (Typical/Dynamic)	3,000:1/10,000:1	3,000:1/10,000:1	
	Response Time (Typical)	8ms	8ms	
	Viewing Angle (Horizontal/Vertical)	178°/178°	178°/178°	
Connectivity	PC Inputs	VGA (D-Sub 15-pin), DVI-D (in/out), DisplayPort	VGA (D-Sub 15-pin), DVI-D (in/out), DisplayPort	
	Video Inputs	Composite, HDMI (2), Component (D-sub 15-pin)	Composite, HDMI (2), Component (D-sub 15-pin)	
	Audio Inputs	RCA (L/R), Stereo mini Jack (in/out)	RCA (L/R), Stereo mini Jack (in/out)	
	Power Out	5V (for optional set back box tuner)	5V (for optional set back box tuner)	
	External Control	RJ45 LAN, RS232C (in/out)	RJ45 LAN, RS232C (in/out)	
	External Sensor	Stereo mini Jack (IR in/out), Mini USB (Ext. BR/IR Sensor)	Stereo mini Jack (IR in/out), Mini USB (Ext. BR/IR Sensor)	
Power	Power Supply	AC 100 - 240 V~ (+/- 10%), 50/60 Hz	AC 100 - 240 V~ (+/- 10%), 50/60 Hz	
	Power Consumption (Typ/Max)	200W/220W / 250W/280W	230W/250W / 300W/320W	
	Stand By Power	< 2 Watts/< 5 Watts	< 2 Watts/< 5 Watts	
Feature	Special	Lamp Error Detection, Anti Retention, Temperature Sensor, RS232C/RJ45 MDC, Built-in Speaker (10W + 10W), Plug and Play (DDC2B), PIP/PBP, Video Wall (10x10), Pivot Display, Button Lock, Digital Daisy Chain, Smart Scheduling, Smart F/W Update, MagicInfo S/W (400UXn-3), Windows Embedded Standard 2009 (400UXn-3)	Lamp Error Detection, Anti Retention, Temperature Sensor, RS232C/RJ45 MDC, Built-in Speaker (10W + 10W), Plug and Play (DDC2B), PIP/PBP, Video Wall (10x10), Pivot Display, Button Lock, Digital Daisy Chain, Smart Scheduling, Smart F/W Update, MagicInfo S/W (460UXn-3), Windows Embedded Standard 2009 (460UXn-3)	
	Media Player Type	N/A / Internal	N/A / Internal	
Dimensions	Product Dimension (Without Stand, W x H x D)	36.0" x 20.7" x 4.6"	41.3" x 23.7" x 4.6"	
	Shipment Dimension (W x H x D)	40.0" x 24.6" x 10.6"	45.1" x 28.3" x 11.8"	
Weight	Product Weight	38.5 lbs./41.8 lbs.	53.9 lbs./57.2 lbs.	
	Shipment Weight	49.5 lbs./52.8 lbs.	64.9 lbs./68.2 lbs.	
Mechanical Specs	VESA Mount	600 x 400mm	600 x 400mm	
	Bezel Width	11mm	11mm	
Operation	Operating Temp/Humidity	0°C - 40°C/10 - 80% / 10°C - 40°C/10 - 80%	0°C - 40°C/10 - 80% / 10°C - 40°C/10 - 80%	
Accessories	Included	Quick Set-up Guide, Warranty Card, Application CD, D-Sub cable, Power Cord, Remote Controller, Batteries, Panel Cover	Quick Set-up Guide, Warranty Card, Application CD, D-Sub cable, Power Cord, Remote Controller, Batteries, Panel Cover	
	Optional	Stand	STN-L3255D	STN-L3255D
		Specialty	STN-520WE (Welcome Board), MID40-LX3, MID462K, MID462DS (Samsung ID), CY-EBIS (Ext. Sensor), SBB-DT3 (Tuner Accessory)	STN-520WE (Welcome Board), MID40-LX3, MID462K, MID462ZDS (Samsung ID), CY-EBIS (Ext. Sensor), SBB-DT3 (Tuner Accessory)
Service	Standard Warranty	3-Year Onsite Parts and Labor	3-Year Onsite Parts and Labor	


GREEN MANAGEMENT

Emission Standard	EMC
Energy Star® 5.0 Compliant	■
ROHS Compliant	■
Packaging Recyclability	■

Emission Standard	EMC
Energy Star® 5.0 Compliant	■
ROHS Compliant	■
Packaging Recyclability	■

CONNECTIVITY

1. IR Loop-Out
2. External Brightness Sensor
3. DVI Out
4. D-Sub In
5. DVI In
6. RGB/DVI/DP/HDMI Audio In
7. DisplayPort
8. DC 5V Out
9. HDMI 1
10. HDMI 2
11. CVBS AV In
12. RJ45 Remote Control
13. Audio Out
14. RS232C In
15. RS232C Out
16. RGB Out
17. MagicInfo Out
18. LAN
19. USB

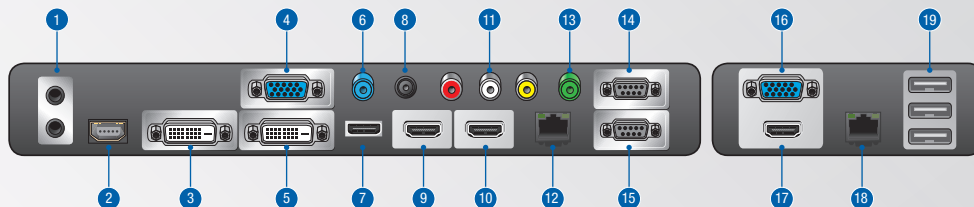

Available at: **NETWORK Spectrum**

Call: 301-733-0657

Email: sales@networkspectrum.com

Other products available at:

www.networkspectrum.com/gsaschedule/

