

SAMSUNG

TECHWIN

SAMSUNG DIGITall
everyone's invited™

Samsung Digital Presenter

SDP-950ST/DX



Compact

Easy To Carry...5.5kgs (Body only)
Saving Space in Your Conference Room



Professional Lens

- : The Brightest And Finest Picture Quality By 1/3" 850,000 Pixels PS(Progressive Scan) CCD
- : An Exclusive 12X Powered Optical Zoom Lens(F3.0, f=6.3~75.6mm)
- : The Fastest And Perfect Auto Focus / Depth of Field 250mm
- : Continuously Working Auto focus
- : 15 Frame Rate Per Second



Easier to Use

- : Convenient Digital Function
 - 90° / 180° / 270° / 360° Rotation (Zoom Available)
 - Image Split & Shift - Image Freeze
 - 3X3 Screen Display - 8 Frames Save
 - 8 Functions Preset upto 4 Conditions
 - Negative / Positive Image Conversion
- : The Most Versatile PC And AV Interface (USB, RS-232, Twain, Win/Mac)
- : Pull down Menu, Writing & Drawing on the Screen by PC Mouse (PS/2)






Samsung Digital Presenter SDP-950 ST/DX

SPECIFICATION	DESCRIPTION	SDP-950ST	SDP-950DX
OPTICAL SYSTEM	LENS, ZOOM	F3.0, f=6.3-75.6mm [12X POWERED OPTICAL ZOOM]	
	SHOOTING AREA	MAX: 297mm X 210mm [11.59 X 8.27 Inch], MIN: 32mm X 24mm [1.26 X 0.94 Inch]	
	FOCUS	AUTO FOCUS / MANUAL FOCUS	
	IRIS	AUTO / MANUAL	
VIDEO	ADAPTOR LENS	REMOVABLE	
	PICK-UP DEVICE	1/3" 850,000 PIXELS PSIPROGRESSIVE SCAN) CCD	
	TOTAL PIXELS	1,077(H) X 788(V)	
	EFFECTIVE PIXELS	1,024(H) X 768(V)	
	FRAME RATE	15 FRAMES/SEC	
	SYNC SYSTEM	INTERNAL SYNC.	
	RESOLUTION	VGA OUT - HORIZONTAL: 570TVL / VIDEO OUT - HORIZONTAL : 350TVL	
PC INTERFACE	S/N RATIO	48dB	
	VIDEO OUTPUT	C-VIDEO / S-VIDEO	
	VGA OUTPUT	1,024 X 768 [XGA] RGB COLOR / 800 X 600 [SVGA] RGB COLOR / 640 X 480 [VGA] RGB COLOR	
	WHITE BALANCE	AUTO / MANUAL	
	USB	BUILT-IN	
	RS-232C	BUILT-IN	
DIGITAL FUNCTIONS	APPLICATION SOFTWARE	WIN / MAC	
	GRAPHIC USER INTERFACE	PULL DOWN MENU, WRITING & DRAWING ON THE SCREEN BY PC MOUSE [PS/2]	
	IMAGE FREEZE	AVAILABLE	
	NEGATIVE/POSITIVE	SELECTABLE	
LIGHTING SYSTEMS	IMAGE SAVE & RECALL	NOT AVAILABLE	8 FRAMES SAVE, 3X3 FRAMES MULTI-DISPLAY
	IMAGE SPLIT AND SHIFT	NOT AVAILABLE	2 IMAGES [SAVE / LIVE]
	IMAGE ROTATION	NOT AVAILABLE	SWITCHABLE BY 90°
	PRESET SAVE	8 FUNCTIONS PRESET UPTO 4 CONDITIONS [ZOOM, FOCUS, IRIS, POSI/NEGA & etc.]	
TERMINALS	UPPER LAMP	SIDE ARM LAMPS	
	LOWER LAMP	BOTTOM LIGHT BOX	
REMOTE CONTROLLER	INPUT	VGA X 2	MOUSE X 1
	OUTPUT	VGA [15P DIN] X 2	S-VIDEO X 1 / C-VIDEO X 1 [RCA]
OPERATION TEMPERATURE		USB X 1	RS-232C [9 PIN] X 1
OPERATION HUMIDITY		SUPPLIED	
POWER SOURCE		+5 °C ~ +35 °C	
POWER CONSUMPTION		30% ~ 90%	
WEIGHT		AC 100V ~ 240V FREE VOLTAGE, 50/60Hz	
DIMENSION		50W	
OPTIONAL ACCESSORIES		5.5Kgs [12.13lb]	
		510mm[W] X 575mm[H] X 410mm[D] [IN USE] / 20.1[W] X 22.6[H] X 16.1[D] Inch [IN USE]	
		LCD MONITOR, CARRYING BAG, LIGHT BOX	

Rear Panel



Dimension

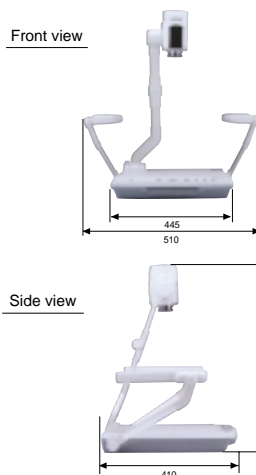

Option



: BAG-950
Deluxe carrying bag



: LCD-5500
You can preview your presentation.

www.samsungpresenter.com

Design and specifications are subject to change without notice.



TECHWIN

SAMSUNG TECHWIN CO., LTD
145-3 Sangdaewon 1-Dong, Jungwon-Gu,
Sunngnam, Kyungki-Do, Korea 462-121
TEL:82-31-740-8137-8141 FAX:82-31-740-8145

SAMSUNG OPTO-ELECTRONICS AMERICA, INC.
ELECTRONIC IMAGING DIV.
40 Seaview Drive, Secaucus N.J. 07094, U.S.A
TEL:201-902-0347 FAX:201-902-9342

Available at: **NETWORK Spectrum®**

Call: 301-733-0657

Email: sales@networkspectrum.com

Other products available at:

www.networkspectrum.com/gsaschedule/