

**SAMSUNG**

TECHWIN

**SAMSUNG DIGITall**  
everyone's invited™

# Samsung Digital Presenter

## SDP-950ST/DX



### Compact

Easy To Carry...5.5kgs (Body only)  
Saving Space in Your Conference Room



### Professional Lens

- : The Brightest And Finest Picture Quality By 1/3" 850,000 Pixels PS(Progressive Scan) CCD
- : An Exclusive 12X Powered Optical Zoom Lens(F3.0, f=6.3~75.6mm)
- : The Fastest And Perfect Auto Focus / Depth of Field 250mm
- : Continuously Working Auto focus
- : 15 Frame Rate Per Second



### Easier to Use

- : Convenient Digital Function
  - 90° / 180° / 270° / 360° Rotation (Zoom Available)
  - Image Split & Shift - Image Freeze
  - 3X3 Screen Display - 8 Frames Save
  - 8 Functions Preset upto 4 Conditions
  - Negative / Positive Image Conversion
- : The Most Versatile PC And AV Interface (USB, RS-232, Twain, Win/Mac)
- : Pull down Menu, Writing & Drawing on the Screen by PC Mouse (PS/2)






# Samsung Digital Presenter SDP-950 ST/DX

SPECIFICATION	DESCRIPTION	SDP-950ST	SDP-950DX	
OPTICAL SYSTEM	LENS, ZOOM	F3.0, f=6.3-75.6mm [12X POWERED OPTICAL ZOOM]		
	SHOOTING AREA	MAX: 297mm X 210mm [11.59 X 8.27 Inch], MIN: 32mm X 24mm [1.26 X 0.94 Inch]		
	FOCUS	AUTO FOCUS / MANUAL FOCUS		
	IRIS	AUTO / MANUAL		
VIDEO	ADAPTOR LENS	REMOVABLE		
	PICK-UP DEVICE	1/3" 850,000 PIXELS PS(PIROGRESSIVE SCAN) CCD		
	TOTAL PIXELS	1,077(H) X 788(V)		
	EFFECTIVE PIXELS	1,024(H) X 768(V)		
	FRAME RATE	15 FRAMES/SEC		
	SYNC SYSTEM	INTERNAL SYNC.		
	RESOLUTION	VGA OUT - HORIZONTAL: 570TVL / VIDEO OUT - HORIZONTAL : 350TVL		
	S/N RATIO	48dB		
PC INTERFACE	VIDEO OUTPUT	C-VIDEO / S-VIDEO		
	VGA OUTPUT	1,024 X 768 [XGA] RGB COLOR / 800 X 600 [SVGA] RGB COLOR / 640 X 480 [VGA] RGB COLOR		
	WHITE BALANCE	AUTO / MANUAL		
	USB	BUILT-IN		
	RS-232C	BUILT-IN		
	APPLICATION SOFTWARE	WIN / MAC		
DIGITAL FUNCTIONS	GRAPHIC USER INTERFACE	PULL DOWN MENU, WRITING & DRAWING ON THE SCREEN BY PC MOUSE [PS/2]		
	IMAGE FREEZE	AVAILABLE		
	NEGATIVE/POSITIVE	SELECTABLE		
	IMAGE SAVE & RECALL	NOT AVAILABLE	8 FRAMES SAVE, 3X3 FRAMES MULTI-DISPLAY	
	IMAGE SPLIT AND SHIFT	NOT AVAILABLE	2 IMAGES [SAVE / LIVE]	
	IMAGE ROTATION	NOT AVAILABLE	SWITCHABLE BY 90°	
LIGHTING SYSTEMS	PRESET SAVE	8 FUNCTIONS PRESET UPTO 4 CONDITIONS [ZOOM, FOCUS, IRIS, POSI/NEGA & etc.]		
	UPPER LAMP	SIDE ARM LAMPS		
	LOWER LAMP	BOTTOM LIGHT BOX		
TERMINALS	INPUT	VGA X 2		
		MOUSE X 1		
	OUTPUT	VGA [15P DIN] X 2		
		S-VIDEO X 1 / C-VIDEO X 1 [RCA]		
		USB X 1		
REMOTE CONTROLLER	RS-232C [9 PIN] X 1			
OPERATION TEMPERATURE	SUPPLIED			
OPERATION HUMIDITY	+5 °C ~ +35 °C			
POWER SOURCE	30% ~ 90%			
POWER CONSUMPTION	AC 100V ~ 240V FREE VOLTAGE, 50/60Hz			
WEIGHT	5.5Kgs [12.13lb]			
DIMENSION	510mm[W] X 575mm[H] X 410mm[D] [IN USE] / 20.1[W] X 22.6[H] X 16.1[D] Inch [IN USE]			
OPTIONAL ACCESSORIES	LCD MONITOR, CARRYING BAG, LIGHT BOX			

## Rear Panel



## Dimension

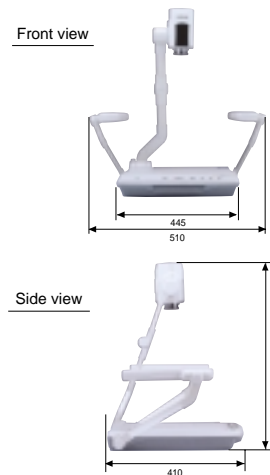

## Option



**: BAG-950**  
Deluxe carrying bag



**: LCD-5500**  
You can preview your presentation.

[www.samsungpresenter.com](http://www.samsungpresenter.com)

Design and specifications are subject to change without notice.



**SAMSUNG TECHWIN CO., LTD**  
145-3 Sangdaewon 1-Dong, Jungwon-Gu,  
Sunngnam, Kyungki-Do, Korea 462-121  
TEL:82-31-740-8137-8141 FAX:82-31-740-8145

**SAMSUNG OPTO-ELECTRONICS AMERICA, INC.**  
**ELECTRONIC IMAGING DIV.**  
40 Seaview Drive, Secaucus N.J. 07094, U.S.A  
TEL:201-902-0347 FAX:201-902-9342

Available at: **NETWORK Spectrum®**

Call: 301-733-0657

Email: [sales@networkspectrum.com](mailto:sales@networkspectrum.com)

Other products available at:

[www.networkspectrum.com/gsaschedule/](http://www.networkspectrum.com/gsaschedule/)